

## TE01B



TE01B è un termometro elettronico con campo di misura da  $-50^{\circ}\text{C}$  a  $+99^{\circ}\text{C}$ . È dotato di un ingresso per sonda di temperatura di tipo PTC o NTC.

Il valore letto dalla sonda viene visualizzato su un display a due cifre più il segno meno.

Le connessioni possono essere su morsettiera a vite oppure su faston.

L'installazione è rapida ed agevole grazie al sistema di fissaggio a scatto; lo strumento si monta a pannello su un foro rettangolare di  $25 \times 58$  mm (oppure su foro di  $29 \times 71$  mm con apposito adattatore).

L'alimentazione può essere diretta a 230V.

## TE01B\_230

Dimensioni frontale:  $32 \times 63$  mm (32x74)

Profondità: 60 mm

Dima di foratura:  $25 \times 58$  mm (29x71)

*TE01B is an electronic thermometer with a range from  $-50^{\circ}\text{C}$  to  $+99^{\circ}\text{C}$ . It has one input for PTC or NTC type temperature probe.*

*The value read by the probe appears on the display with two digits plus the minus sign.*

*Connections can be screw block or faston.*

*Easy and quick installation with the click-on mounting system. Can be mounted on  $25 \times 58$  mm holes (or on  $29 \times 71$  mm holes with adaptor).*

*Direct power supply 230V available.*

## TE01B\_230

Panel size:  $32 \times 63$  mm (32x74)

Depth: 60 mm

Mounting hole:  $25 \times 58$  mm (29x71)

Probe connector: faston  $4.8 \times 0.8$  mm

Power connector: faston  $6.3 \times 0.8$  mm

ambient temperature:  $-10 \dots +55^{\circ}\text{C}$

## TE01B\_230\_S

Panel size:  $32 \times 63$  mm (32x74)

Depth: 82 mm

Mounting hole:  $25 \times 58$  mm (29x71)

Probe connector: screw block

Conessioni sonda: faston 4.8x0.8 mm

Power connector: screw block

Conessioni alimentazione: faston 6.3x0.8 mm

ambient temperature: -10...+55 °C

Temperatura ambiente: -10...+55 °C

## TE01B\_230\_S

Dimensioni frontale: 32x63 mm (32x74 )

### CONNESSIONI

1-2 ingresso sonda

### WIRING

probe input


Profondità: 82 mm

5-6 alimentazione

power supply

Dima di foratura: 25x58 mm (29x71)

Conessioni sonda: su morsettiera a vite

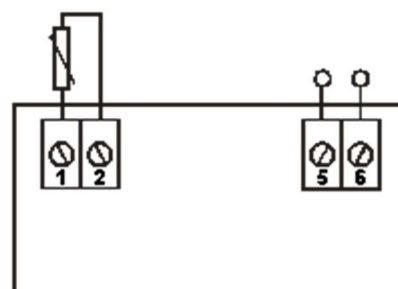

Conessioni alimentazione: su morsettiera a vite

Temperatura ambiente: -10...+55 °C

MODELLO / MODEL	TE01B	230	-	-
ALIMENTAZIONE / POWER SUPPLY:	230 Vac			
TIPO DI SONDA / PROBE TYPE:	- PTC, N NTC			
CONNESSIONI / CONNECTIONS:	- FASTON			
<b>S</b> MORSETTIERA A VITE / SCREW BLOCK				